

## Maillon Rapide Load Stamped Stainless Steel Standard Quick Link




Load stamped stainless steel standard quick link by Maillon Rapide.

The maximum permitted working load is displayed on each item by the working load limit (WLL) in Kg.

A safety factor of 5 is defined according to product safety.

CE Marking available on request.

Stainless Steel AISI 316

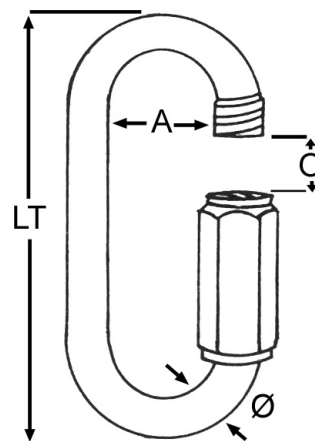

Part	Dia mm	LT mm	A mm	O mm	WLL Kg.	Break Load Kg.
MR-ST03	3.0	31.0	8.5	4.0	160	800
MR-ST03.5	3.5	36.0	10.0	5.0	220	1100
MR-ST04	4.0	39.5	11.5	5.5	280	1400
MR-ST05	5.0	49.5	13.0	6.5	450	2250
MR-ST06	6.0	57.0	14.5	7.5	650	3250
MR-ST07	7.0	66.0	16.0	8.5	900	4500
MR-ST08	8.0	74.0	17.5	11.0	1100	5500
MR-ST10	10.0	89.0	20.5	12.0	1800	9000
MR-ST12	12.0	104.5	23.5	15.0	2500	12500
MR-ST14	14.0	121.0	26.5	17.0	3500	17500
MR-ST16	16.0	140.0	29.5	19.0	4500	22500