


UNISUN M



Monocrystalline module:
series connections on the front face
of the cells

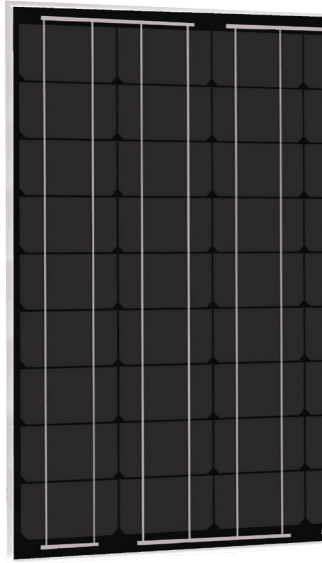

10% of the surface is hidden by the
electrical connections

ex. panels with 125 mm x 125 mm
cells

intensity (Imp) 2,5-2,8 A

voltage (Vmp) 0,5-0,52 V

electrical contact front
contact


cell efficiency **20,5%**

number of cells 36 cells
necessary for battery (36 x 0,5 V)
charging = 18 V

compactness of panel ++

saving money +++

UNISUN BC

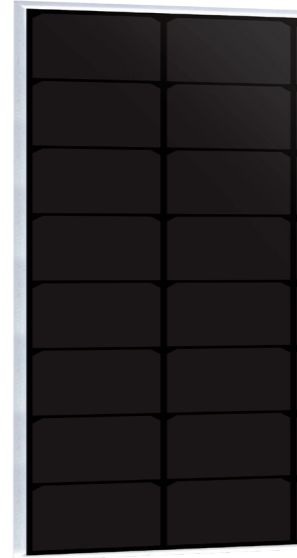

Back contact module:
series connections on the back
of the cells



No areas covered on the front face

ex. panels with 125 mm x 125 mm
cells

intensity (Imp) 3,2-3,3 A

voltage (Vmp) 0,56-0,57 V

electrical contact back contact

cell efficiency **23-24%**


number of cells 32 cells
necessary for battery (32 x 0,57 V)
charging = 18 V

panel compactness +++

saving money ++




HIGH QUALITY STRUCTURE

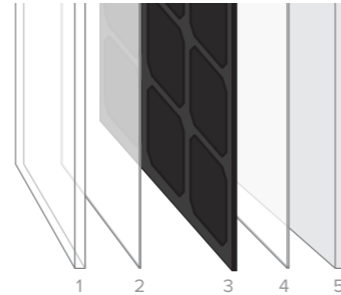

1. Tempered glass 3.2mm, high transmissibility (low iron content)
2. EVA Resin 0,45mm
3. Highly efficient cells
4. EVA Resin 0,45mm
5. Frame (anodised aluminium)

QUICK CONNECTORS

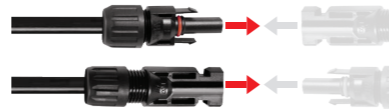

ANTI HOT-SPOT



Protection against Hot-spots
and surges

UNISUN M & BC rigid solar panels

HIGH EFFICIENCY

UNISUN is the range of high performance monocrystalline panels for leisure applications (boating and camping-car), isolated sites or signage.

Their multi-layer structure guarantees exceptional yields, even in very low sunlight conditions.

The thickness of their aluminum frame (35 or 40 mm) allows a better heat dissipation and thus more power.

On the surface, their high transmissibility tempered glass and their anodized aluminum frame protect them from external attacks (shocks, oxidation, corrosion)

Modular for more power, their series or parallel connection is made easy thanks to their fast solar connectors.

The UNISUN range is available in standard monocrystalline cells and back contact monocrystalline cells. UNISUN Back Contact (electrical contact at the back) has the entire cell surface to capture light energy.

With the same power, thanks to their higher efficiency (power/surface ratio), back contact panels offer the advantage of being more compact and therefore ideal for applications where space or weight are criteria of choice.

For more aesthetics and sobriety, the standard UNISUN monocrystalline panels from 50W are equipped with the premium design "Black Backsheet". (black background).

Quality guaranteed
by Uniteck
Made in P.R.C.

CE
EN61215
et EN61730


UNITECK

Highly efficient cells

Excellent impact and weight resistance (3.2 mm tempered glass + aluminum frame)


TÜV certified waterproof junction box with hot-spot protection

Exceptional output even under weak light

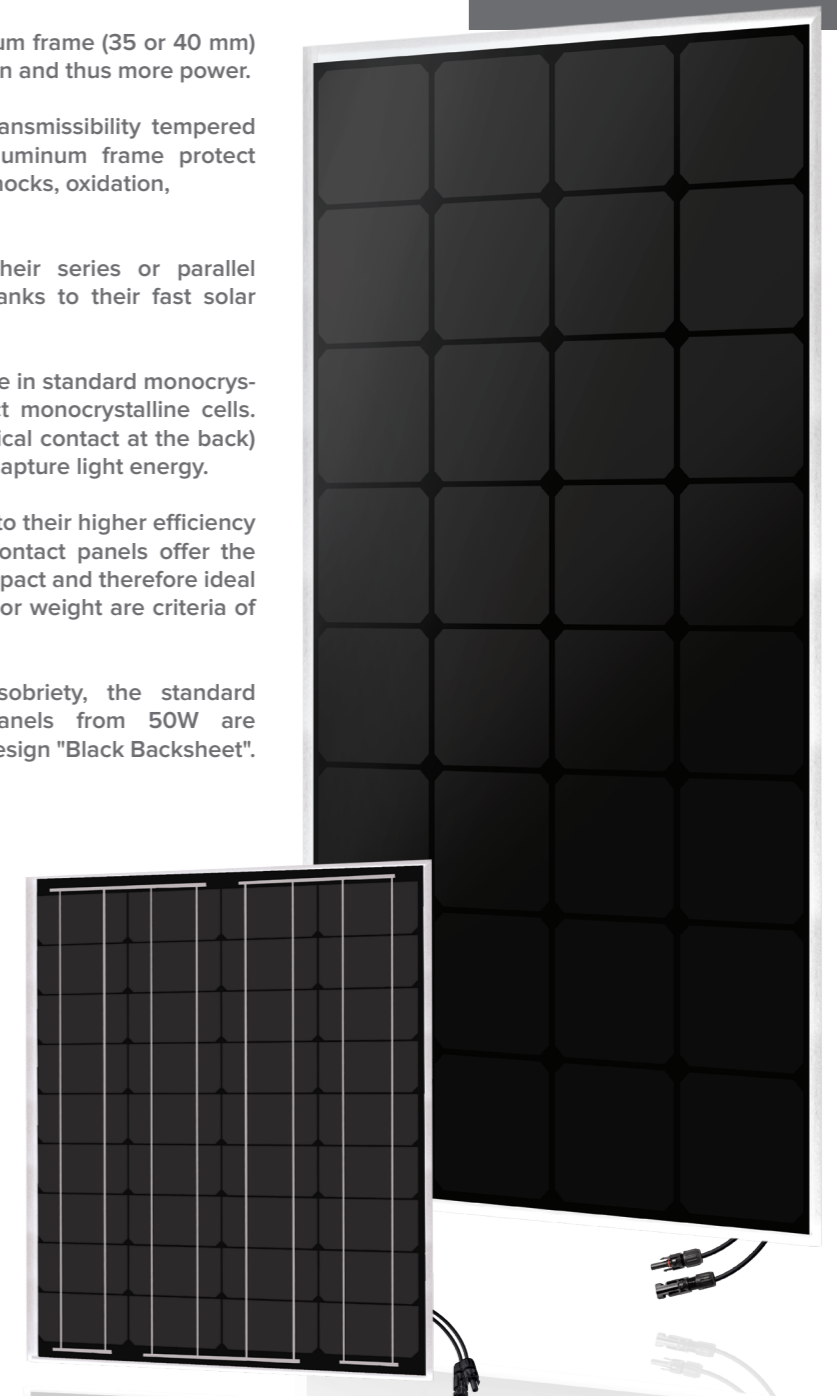


SOLAR PRODUCTION EXPLANATION

i Intensity/voltage curve (eg. panel of 150W) depending on solar radiation W/m²

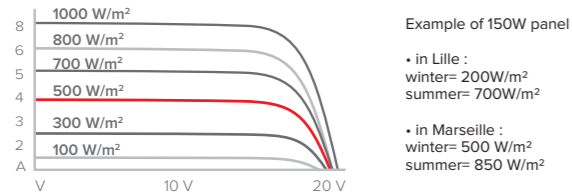

With solar radiation in Marseille, during winter, a solar panel will produce 50% of its power (=500W/m²)

i Distribution of daily solar production in France

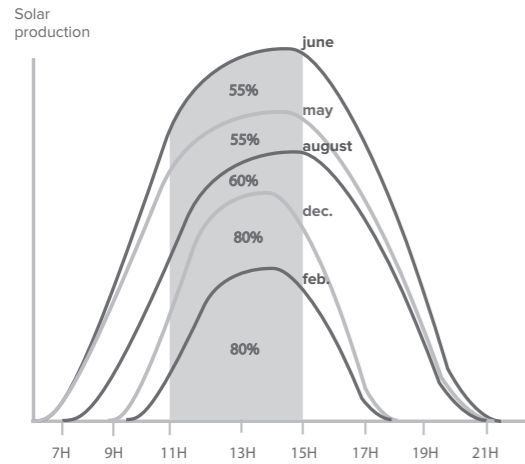

The solar production has a Gaussian curve (bell-shaped curve), with a sunlight main period between 11 a.m. and 3 p.m. During winter, 80% of the production is made during this period when the data is between 50% and 60% during summer (it is because the sunlight period is more spread).

i Average coefficient of solar production in France.


	Lille	Bordeaux	Marseille
January	x 0,7 - 1	x 1 - 1,5	x 1,5 - 2
February	x 1 - 1,5	x 1,5 - 2,5	x 2 - 3
March	x 2 - 2,5	x 3 - 3,5	x 3 - 4
April	x 3 - 3,5	x 3,5 - 4	x 4 - 5
May	x 3 - 4	x 4 - 5	x 4,5 - 6
June	x 4 - 4,5	x 4 - 6	x 5 - 6,5
July	x 4 - 4,5	x 4 - 6	x 5 - 7
August	x 3,5 - 4	x 4 - 5	x 4,5 - 6
September	x 2,5 - 3	x 3,5 - 4	x 4 - 4,5
October	x 1,5 - 2	x 2 - 2,5	x 2,5 - 3
November	x 0,7 - 1	x 1 - 1,5	x 1,5 - 2,5
December	x 0,5 - 0,7	x 0,8 - 1,5	x 1,5 - 2

In July a panel in Marseille will produce from 5 to 7 times its power (eg. for a panel of 100W = 500 to 700Wh/j)




UPGRADABLE COMBINATION

Parallel connection: for more power (Watt)

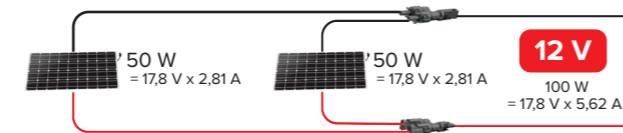


Series connection: for your 24V batteries

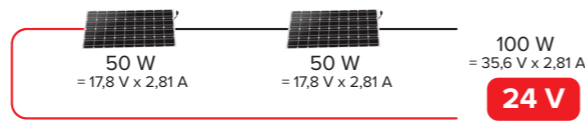

	20 W	40 W	100 W	150 W	300 W
UNISUN 20.12M	x1	x2	-	-	-
UNISUN 50.12M	-	-	x2	x3	-
UNISUN 150.12M	-	-	-	-	x2
UNICONNECT 1.6	x1	x1	x1	x1	x1
Parallel connectors kit	-	2 pan.	2 pan.	3 pan.	2 pan.

HOLE SPACING ADAPTED TO UNITECK MOUNTING BRACKETS

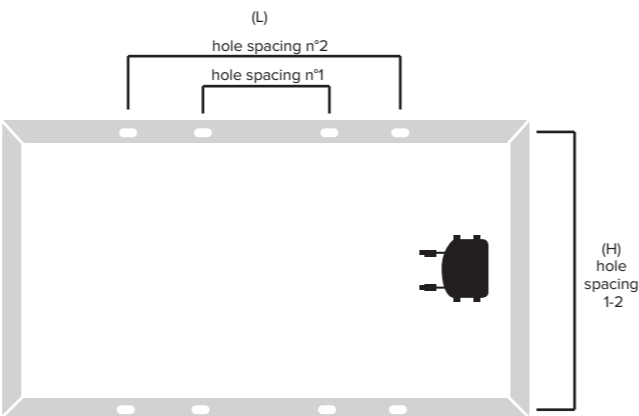

UNISUN M & BC rigid solar panels

	UNISUN 5.12 M	UNISUN 10.12 M	UNISUN 10.24 M	UNISUN 20.12 M	UNISUN 20.24 M
	Ref 0491	Ref 0798	Ref 1436	Ref 0071	Ref 0804

Electrical performance

	5 W	10 W	10 W	20 W	20 W
Max. power (Pm)*	5 W	10 W	10 W	20 W	20 W
Power tolerance*	0/+3 %	0/+3 %	0/+3 %	0/+3 %	0/+3 %
Operating voltage	12 V	12 V	24 V	12 V	24 V
Technology	mono	mono	mono	mono	mono
Voltage at max. power (Vmp)*	17,4 V	17,6 V	35,2 V	17,8 V	35,2 V
Intensity at max. power (Imp)*	0,29 A	0,57 A	0,29 A	1,12 A	0,57 A
Voltage in open circuit (Voc)*	21,6 V	21,77 V	43,54 V	22,3 V	43,54 V
Intensity in short circuit (Icc/ ISC)*	0,32 A	0,65 A	0,33 A	1,21 A	0,65 A
Cell efficiency	20,60%	18,4%	18,4%	20,60%	20,60%
Module efficiency*	7,56%	11,52%	11,52%	12,65%	12,65%

Maximum battery charging power***

12V Battery	with PWM controller	0,23 A	0,46 A	n.a.	0,90 A	n.a.
	with MPPT controller	0,33 A	0,65 A	0,65 A	1,30 A	1,30 A
24V Battery	with PWM controller	n.a.	n.a.	0,23 A	n.a.	0,46 A
	with MPPT controller	n.a.	n.a.	0,33 A	n.a.	0,65 A

Temperature characteristics

Operating temperature	-40/+85°C	-40/+85°C	-40/+85°C	-40/+85°C	-40/+85°C	
NOCT / TUC**	45 ±2°C	45 ±2°C	45 ±2°C	45 ±2°C	45 ±2°C	
Temperature coefficient	Pm	-0,43%/°C	-0,48%/°C	-0,48%/°C	-0,48%/°C	-0,48%/°C
	Voc	-0,34%/°C	-0,34%/°C	-0,34%/°C	-0,34%/°C	-0,34%/°C
	Icc	0,05%/°C	0,037%/°C	0,037%/°C	0,037%/°C	0,037%/°C

Mechanical characteristics

Anodised aluminium frame	yes	yes	yes	yes	yes
Black backsheet design	no	no	no	no	no
Hole spacing for fixing (mm)	n ¹ - L x H	154 x 195	120 x 260	120 x 260	120 x 260
	n ² - L x H	-	183 x 260	183 x 260	420 x 260
Cable length (with connectors)	-	-	-	-	-
Module dimensions (mm)	216x306x18	310x280x35	310x280x35	510x310x35	660x310x35
Module weight	0,8 kg	1,3 kg	1,3 kg	2 kg	2 kg

Product warranty

Period	5 years	5 years	5 years	5 years	5 years
--------	---------	---------	---------	---------	---------

*According to standard test conditions (STC): irradiance 1000 W/m², AM= 1,5, cell temperature 25°C.
 ** Nominal Operating Cell Temperature: Irradiance 800 W/m², wind speed 1 m/s, ambient temperature 25°C.
 ***According to NMOT standard- Nominal Module Operating Temperature (=test condition in real situation) : irradiance 800W/m², ambiante temperature 20°C, wind speed 1 m/s

UNISUN M & BC rigid solar panels



Model	Ref 0842	Ref 0088	Ref 1238	Ref 1870	Ref 0095	Ref 0446	Ref 1245	Ref 1443	Ref 0453	Ref 1528	Ref 1887	Ref 3324	Ref 1337	Ref 2013
UNISUN 30.12 M														
UNISUN 50.12 M														
UNISUN 65.12 BC														
UNISUN 50.24 M														
UNISUN 80.12 M														
UNISUN 100.12 M														
UNISUN 120.12 BC														
UNISUN 100.24 M														
UNISUN 150.12 M														
UNISUN 165.12 BC														
UNISUN 150.24 M														
UNISUN 200.12 BC														
UNISUN 200.24 M														
UNISUN 300.12 M														

Electrical performance

Max. power (Pm)*	30 W	50 W	65 W	50 W	80 W	100 W	120 W	100 W	150 W	165 W	150 W	200 W	200 W	300 W
Power tolerance*	0/+3 %	0/+3 %	0/+3 %	0/+3 %	0/+3 %	0/+3 %	0/+3 %	0/+3 %	0/+3 %	0/+3 %	0/+3 %	0/+3 %	0/+3 %	+/-3 %
Operating voltage	12 V	12 V	12 V	24 V	12 V	12 V	12 V	24 V	12 V	12 V	12 V	12 V	24 V	12 V
Technology	mono	mono	back contact	mono	mono	mono	back contact	mono	mono	back contact	mono	back contact	mono	mono
Voltage at max. power (Vmp)*	17,8 V	17,8 V	18,6 V	36,6 V	17,8 V	17,8 V	19,80 V	36,6 V	17,8 V	27,9 V	36,6 V	34 V	35,6 V	30,5 V
Intensity at max. power (Imp)*	1,69 A	2,81 A	2,96 A	1,4 A	4,49 A	5,62 A	6,06 A	2,81 A	8,43 A	5,38 A	4,2 A	6,24 A	5,62 A	9,82 A
Voltage in open circuit (Voc)*	22,3 V	22,3 V	21,8 V	42,7 V	22,3 V	22,3 V	23,30 V	42,7 V	21,3 V	33,5 V	42,7 V	40,0 V	42,7 V	35,5 V
Intensity in short circuit (Icc/ ISC)*	1,82 A	3,03 A	3,13 A	1,5 A	4,85 A	6,07 A	6,42 A	3,04 A	9,10 A	5,81 A	4,5 A	5,88 A	6,07 A	11,1 A
Cell efficiency	20,60%	20,60%	19,26%	20,60%	20,60%	20,60%	20,96%	20,60%	20,60%	21,14%	20,60%	23,8%	20,60%	20,60%
Module efficiency*	11,86%	14,20%	18,18%	14,20%	15,15%	17,32%	19,05%	15,15%	16,58%	20,54%	16,58%	20,43%	15,8%	19,6%

Maximum battery charging power***

12V battery	with PWM controller	1,35 A	2,25 A	2,50 A	n.a.	3,88 A	4,86 A	n.a.	n.a.	7,28 A	n.a.	n.a.	n.a.	n.a.
	with MPPT controller	1,96 A	3,26 A	3,59 A	3,26 A	5,22 A	6,52 A	7,17 A	6,52 A	9,78 A	10,76 A	9,78 A	13,04 A	13,04 A
24V battery	with PWM controller	n.a.	n.a.	n.a.	1,20 A	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	3,60 A	n.a.	4,86 A
	with MPPT controller	n.a.	n.a.	n.a.	1,63 A	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	4,89 A	n.a.	6,52 A

Temperature characteristics

Operating temperature	-40/+85°C	-40/+85°C	-40/+85°C	-40/+85°C	-40/+85°C	-40/+85°C	-40/+85°C	-40/+85°C	-40/+85°C	-40/+85°C	-40/+85°C	-40/+85°C	-40/+85°C	-40/+85°C
NOCT / TUC**	45 ±2°C	45 ±2°C	45 ±2°C	45 ±2°C	45 ±2°C	45 ±2°C	45 ±2°C	45 ±2°C	45 ±2°C	45 ±2°C	45 ±2°C	45 ±2°C	45 ±2°C	45 ±2°C
Temperature coefficient	Pm	-0,43%/°C	-0,43%/°C	-0,3%/°C	-0,43%/°C	-0,43%/°C	-0,43%/°C	-0,43%/°C	-0,43%/°C	-0,48%/°C	-0,3%/°C	-0,43%/°C	-0,3%/°C	-0,43%/°C
	Voc	-0,34%/°C	-0,34%/°C	-0,28%/°C	-0,34%/°C	-0,34%/°C	-0,28%/°C	-0,34%/°C	-0,34%/°C	-0,34%/°C	-0,28%/°C	-0,34%/°C	-0,28%/°C	-0,34%/°C
	Icc	0,05%/°C	0,05%/°C	0,05%/°C	0,05%/°C	0,05%/°C	0,05%/°C	0,05%/°C	0,05%/°C	0,037%/°C	0,05%/°C	0,05%/°C	0,05%/°C	0,05%/°C

Mechanical characteristics

Anodised aluminium frame	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes
Black backsheet design	no	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes
Hole spacing for fixing (mm) *	n°1 - L x H	200 x 500	120 x 500	120 x 500	120 x 500	127 x 500	127 x 500	127 x 500	127 x 500	600 x 626	600 x 626	600 x 626	600 x 626	800 x 768
	n°2 - L x H	-	420 x 500	420 x 500	420 x 500	860 x 500	710 x 500	860 x 500	860 x 500	1100 x 626	1100 x 626	1100 x 626	1100 x 626	1300 x 768
Cable length (with connectors)	900 mm	900 mm	900 mm	900 mm	900 mm	900 mm	900 mm	900 mm	900 mm	900 mm	900 mm	900 mm	900 mm	900 mm
Module dimensions (mm)	310x680x35	640x550x35	550x550x35	660x550x35	960x550x35	1050x550x35	1050x550x35	1200x550x35	1340x675x35	1190x675x35	1500x675x35	1450x675x35	1580x808x40	1500x990x40
Module weight	3,1 kg	4,1 kg	3,8 kg	4,1 kg	6,3 kg	7,0kg	7,0 kg	7,5 kg	9,8 kg	9,3 kg	10,8 kg	12,9 kg	13,6 kg	15,5 kg

Product warranty

Period	5 years	5 years	5 years	5 years	5 years	5 years	5 years	5 years	5 years	5 years	5 years	5 years	5 years	5 years
--------	---------	---------	---------	---------	---------	---------	---------	---------	---------	---------	---------	---------	---------	---------

*According to standard test conditions (STC): irradiance 1000 W/m², AM= 1,5, cell temperature 25°C.

** Nominal Operating Cell Temperature: Irradiance 800 W/m², wind speed 1 m/s, ambient temperature 25°C.

***According to NIMOT standard- Nominal Module Operating Temperature (=test condition in real situation) : irradiance 800W/m², ambient temperature 20°C, wind speed 1 m/s